


## e18T-3

Temperature Rating: Cone 10

Volume: 3.7 Cubic Feet

Brick Thickness: 3" Brick

Inside: 16.5" Diam x 27" High

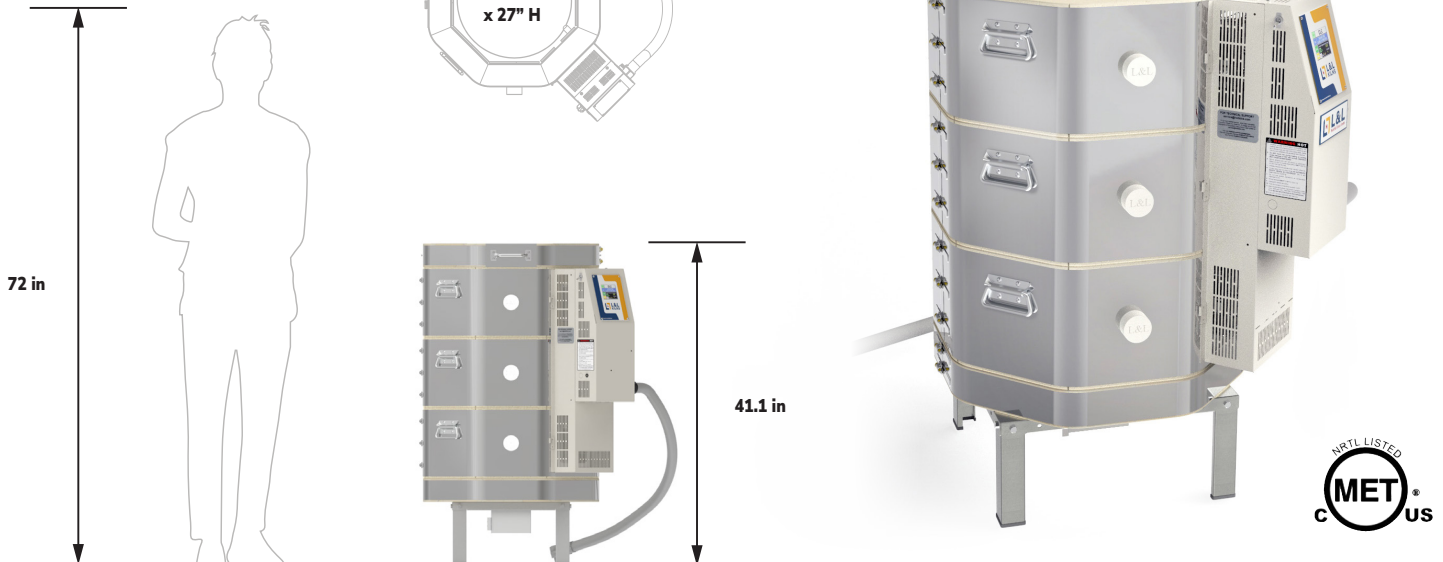


*This is the classic L&L pottery kiln used by most of our customers. They include all the signature L&L features.*

### GENERAL DIMENSIONS



Scan OR Visit:  
hotkilns.com  
/e18T-3-GD

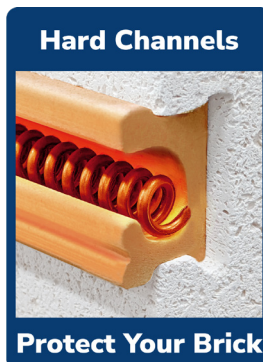

- **Genesis Touch Screen Control** • with Kiln Aid app
- **Dynamic Zone Control** • for even firing
- **Hard Ceramic Element Channels** • protect your elements and kiln
- **Type K Thermocouples (3)** • with protection tubes
- **Top Loading**
- **Solid, Straight-View Peephole Plugs**
- **Full-Support Stand** • rolling option available
- **Easy-Access Control Panel** • with Easy-View tilted display
- **Three-Year Limited Warranty**
- **c-MET-us listed to UL499 Standards**
- **See hotkilns.com/e18t-3 for all features and options**

**TRUST YOUR KILN**  
**hotkilns.com**

Manufactured in Swedesboro, NJ  
800-750-8350 • sales@hotkilns.com

Bulletin No: BL-e18T-3 REV: 0

Page 1




## Electrical Specifications for e18T-3 SERIES

USA

WORLD

Model Numbers	Part Number for 3" Brick	Volt/ Phase	Watts	Amps	Wire Size	Fuse Size	Power Connection
e18T-3-240	K-E-18T3/31	240/1P	8,400	35.0	6 ga	50 Amps	6-50 Cordset
e18T-3-240-3P	K-E-18T3/32	240/3P	8,400	20.2	10 ga	30 Amps	15-50 Cordset
e18T-3-208	K-E-18T3/21	208/1P	8,400	40.4	6 ga	60 Amps	6-50 Cordset
e18T-3-208-3P	K-E-18T3/22	208/3P	8,400	23.3	10 ga	30 Amps	15-50 Cordset
e18T-3-220	K-E-18T3/41	220/1P	8,400	38.2	6 ga	50 Amp	Direct Wire
e18T-3-380-3PY	K-E-18T3/52	380/3PY	8,400	12.7	14 ga	20 Amp	Direct Wire



**Control:** Full digital touchscreen Genesis control with easy-to-use interface, WiFi enabled app, and simple programs for firing ceramics.

**MET UL499 Listing:** All models are c-MET-us listed to UL499 standard.

**Cone Rating:** All e18-3 models are rated to Cone 10.

**Wiring Diagrams:** See the **Electrical Tab** for each kiln model to get the wiring diagram for each voltage.

**Power connection:** A six foot cord with a 50 amp NEMA 6-50 for single phase units or a 15-50 plug for 3 phase units is included. (No neutral is necessary). World voltage kilns do not include a cord - they are direct wired. All kilns may be direct wired.

**Elements:** All elements are of equal resistance value. T models have six elements.

**Other voltages** for any country in the world are available. Examples are 200V/3 Phase Delta, 220V/3 Phase Delta, 415V/3 Phase Wye and 400V/3 Phase Wye. CE Listing available in some countries. See 380 Volt diagrams for electrical specifications for 400V/3 Phase Wye and 415V/3 Phase Wye.

**Moving and installation:** The kiln comes assembled but can be quickly disassembled and reassembled to move through any door or up stairs. It comes packed in a skidded carton with secure foam-in-place packaging.

**Shipping Dimensions:** See website for shipping dimensions with various combinations of options.




### FURNITURE KIT FOR e18T-3

**Part Number:** H-E-K18T/30



**Includes:** Two 15" (38.1 cm) full shelf and four half shelves, one post kit with six each 1/2", 1", 2", 4", 6", and 8" square posts, and one pair heat resistant gloves.

# EASY-FIRE e18T-3


Kiln Capacity

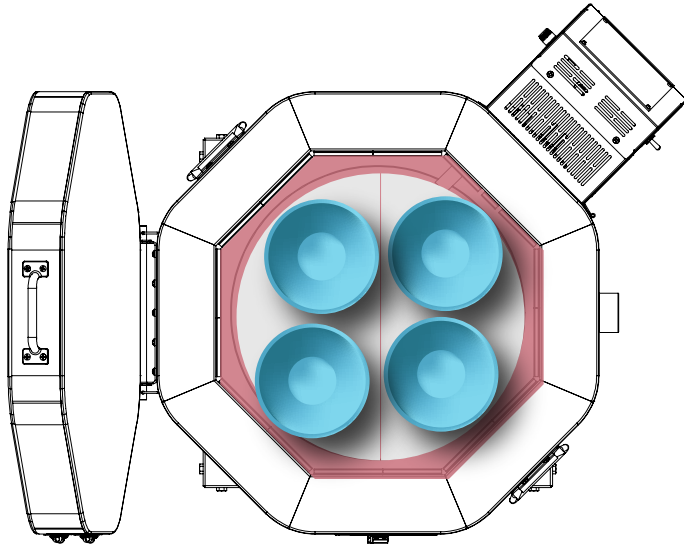

**EASY-FIRE e18T-3**  
TOP VIEW

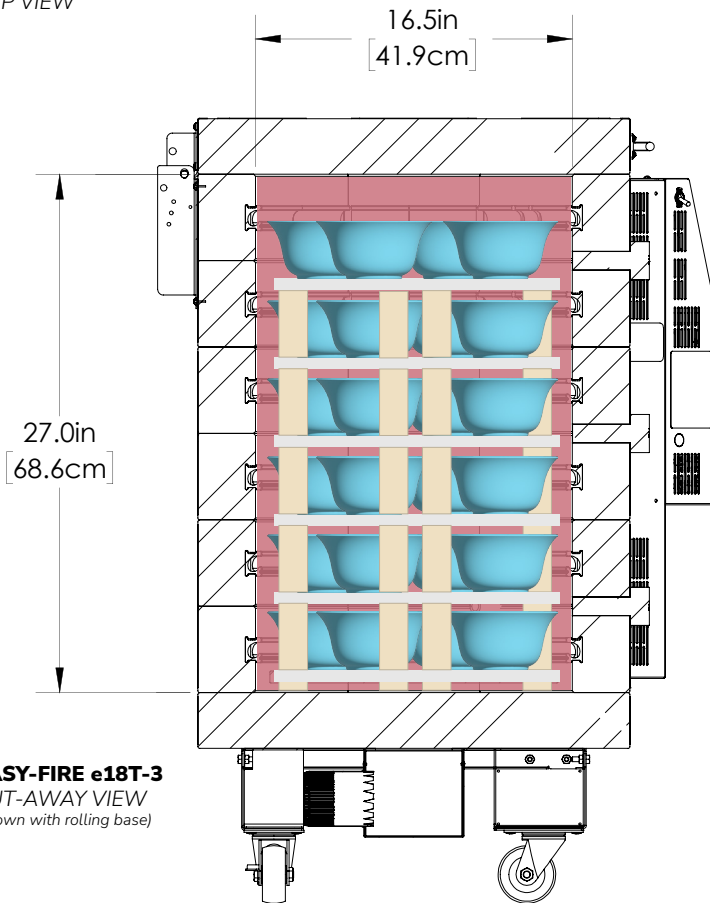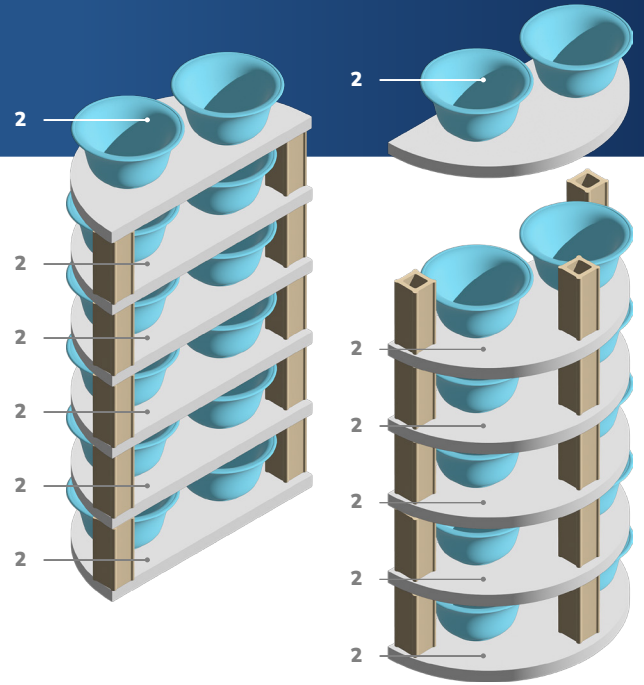

**EASY-FIRE e18T-3**  
CUT-AWAY VIEW  
(shown with rolling base)



**EASY-FIRE e18T-3**  
27" H x 16.5" W  
3.7 CU FT

Approx: 24 Bowls

- KILN INTERIOR**
- 6" x 3" Bowl**
- KILN POST**
- 15" x .625" HALF ROUND SHELF**

**TRUST YOUR KILN**  
**hotkilns.com**

Manufactured in Swedesboro, NJ  
800-750-8350 • sales@hotkilns.com

Bulletin No: BL-e18T-3 REV: 0

Page 3

